


SIDE VIEW

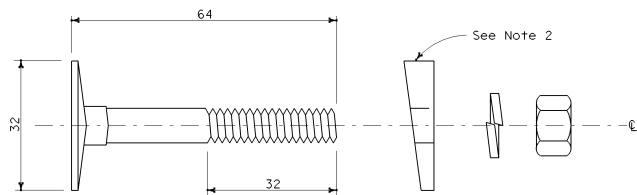

MOUNTING HARDWARE

A-2 HARDWARE QUANTITY TABLE

SIGN LENGTH mm	SIGN DEPTH mm - See Note 3	UNITS REQUIRED See Note 5
4267 or less	1270 - 1524	9
4572 - 7315	1270 - 1524	13
6096 - 7315	1270 - 1524	13
4267 or less	1778 - 3048	17
4572 - 7315	1778 - 3048	25
6096 - 7315	1778 - 3048	26



DIST.	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET TOTAL NO. SHEETS

REGISTERED CIVIL ENGINEER

July 1, 2004  
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to: <http://www.dot.ca.gov>

REGISTERED PROFESSIONAL ENGINEER  
Tillot Satter  
No. C42892  
Exp. 03-31-2006  
CIVIL  
STATE OF CALIFORNIA

## NOTES

1. Refer to applicable Standard Plan for additional mounting details.
2. Beveled washer for flange mounting only.
3. Elevator head bolt, hexagon nut, and lock washer shall be 8 mm diameter (18-8) cadmium plated steel.
4. Furnish retroreflective stick-ons for bolt head in same color as sign. Retroreflective stick-ons are applied at time of installation.
5. One unit of A-2 hardware shall consist of one each; bolt nut, washer and beveled washer.
6. Signs 2794 mm and 3048 mm in depth may be fabricated in three panel sections to avoid legend from being placed on a horizontal seam. Increase number of units of mounting hardware accordingly.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TYPE A-2 MOUNTING HARDWARE  
OVERHEAD LAMINATED  
TYPE A PANEL  
BOX BEAM CLOSED TRUSS,  
BRIDGE MOUNTED AND  
TUBULAR SIGN STRUCTURES**

NO SCALE  
ALL DIMENSIONS ARE IN  
MILLIMETERS UNLESS OTHERWISE SHOWN

S88